


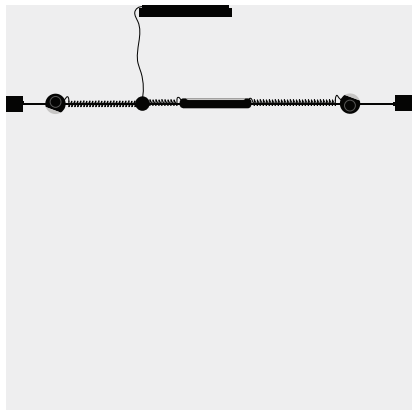

Type	hello Starter Set Horizontal
Order No	HEL20-11-8027-00
Lamp type/assembly	Cable system
Version	Horizontal
Colour	Black
Light source	LED
Colour temperature	2700 K
Colour rendering index	CRI > 90
Operating mode	On/Off
Operation	On remote
Ballast (number)	LED converter, On/Off, output 48 V DC (1)
Beam angle	15° / very wide flood
Total luminous flux of luminaire	520 lm / 1120 lm (Hello Spot / Hello Flood)
Power consumption	max. 58 W
LED service life	55 000 h (L85)
Packaging units	1 (600 x 300 x 100)
Tooltip Description	Tension wire system belux hello: supplied universal dowels and screws are suitable for fixation in solid brick or concrete walls (ceiling). For drywalls, plasterboard, suspended ceilings, cavity bricks, wooden cladding or similar, measures for reinforcement must be taken prior to installation. It is the responsibility of the installer/user to choose suitable fixation technology! When planning numerous light sources (spots, floods) the additional weight might force the tension wire to sag. belux therefore always recommends an intermediate suspension BL540 144 000 007 when planning system lengths >= 5000mm.
Contents	Hello Spot 15° (2); Hello Flood; Hello Connect, L 350..1000 mm (2); Hello Connect, L 600..2000 mm; wall/ceiling connection, On/Off, max. 58 W; cable holder (2); system supply, max. 58 W; secondary cable, 2 x 0.25 mm ² , L 3000 mm; tension cable, L 8000 mm

Belux AG
Neufeldweg 6, CH-5103
Möriken
Tel. +41 61 316 74 01
Fax +41 61 316 75 99
www.belux.com
belux@belux.com