


Type/Order No	FLA10-12-MS
Lamp type/assembly	Standing light
Version	Tube symmetric (symmetrical)
Light source	4x TC-L (FSDH) 55W; 2G11
Operating mode	Multisens
Operation	Self-adjusting
Ballast (number)	Electronic ballast dimmable (2)
Lamp head	Aluminium die-cast, alu-coloured, wet painted
Diffuser	PMMA, prismatic, metallised
Tube	Steel, alu-coloured, wet painted
Base	Steel, black, powder-coated
Power cable	Black, 3x0.75mm ² , L 5000 mm
Mains plug	Schuko plug type E+F
Light distribution	Direct (31.5%) / indirect (68.5%)
Power consumption	220 W
Luminaire efficacy	81.5%
Mains voltage	230V/50Hz
Stand-by consumption	< 0.5W
Safety class	I
Protection type	IP 20
Packaging units	3 (1950 x 150 x 150 + 800 x 400 x 250 + 420 x 330 x 150 mm)
Weight	20.5 kg
Guarantee	36 months

Belux AG
 Neufeldweg 6, CH-5103
 Möriken
 Tel. +41 61 316 74 01
 Fax +41 61 316 75 99
 www.belux.com
 belux@belux.com

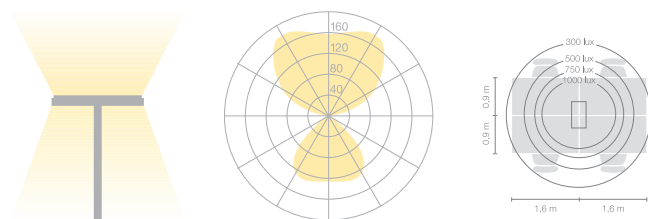

≈81.5% CD/1000lm