





Type/Order No	UTN40-14-TD-8027
Lamp type/assembly	Table light
Size	H 330 mm
Energy efficiency class	A
Light source	LED, 1x 900 lm
Colour temperature	2700 K
Colour rendering index	CRI > 80
Operating mode	Dimmable
Operation	On tube
Ballast (number)	Driver (1), cable integrated
Lamp head	Die cast aluminum, wet painted, graphite black
Diffuser	PMMA, frosted on one side
Tube	Extruded aluminum profile, wet painted, graphite black
Base	Zinc die-cast, wet painted, graphite black
Finish	Black
Power cable	Black, L 3000 mm
Mains plug	Schuko plug type E+F
Light distribution	Direct
Beam angle	Adjustable 40° / 80°
Total luminous flux of luminaire	900 lm
Power consumption	13W
Mains voltage	220-240V / 50Hz
Stand-by consumption	< 0,5 W
Safety class	I
Protection type	IP 20
Packaging units	1 (415 x 270 x 270 mm)
Weight	4.7 kg
Guarantee	36 months

Belux AG

Neufeldweg 6, CH-5103
Möriken
Tel. +41 61 316 74 01
Fax +41 61 316 75 99
www.belux.com
belux@belux.com

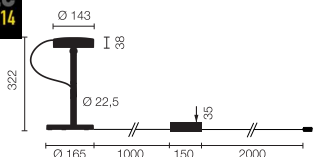

design
preis
SCHWEIZ

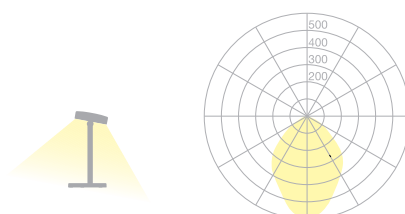

γ=97% cd/1000 lm