





Type/Order No	UTN40-15-TD-8027
Lamp type/assembly	Table light
Size	H 330 mm
Energy efficiency class	A
Light source	LED, 1x 900 lm
Colour temperature	2700 K
Colour rendering index	CRI > 80
Operating mode	Dimmable
Operation	On tube
Ballast (number)	Driver (1), cable integrated
Lamp head	Die cast aluminum, wet painted, telegrey
Diffuser	PMMA, frosted on one side
Tube	Extruded aluminum profile, wet painted, telegrey
Base	Zinc die-cast, wet painted, telegrey
Finish	Telegrey
Power cable	Black, L 3000 mm
Mains plug	UK plug type G
Light distribution	Direct
Beam angle	Adjustable 40° / 80°
Total luminous flux of luminaire	900 lm
Power consumption	13W
Mains voltage	220-240V / 50Hz
Stand-by consumption	< 0,5 W
Safety class	I
Protection type	IP 20
Packaging units	1 (415 x 270 x 270 mm)
Weight	4.7 kg
Guarantee	36 months

**Belux AG**

Neufeldweg 6, CH-5103  
Möriken  
Tel. +41 61 316 74 01  
Fax +41 61 316 75 99  
www.belux.com  
belux@belux.com

design  
preis  
SCHWEIZ

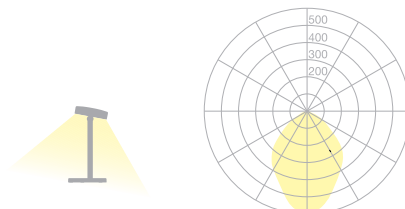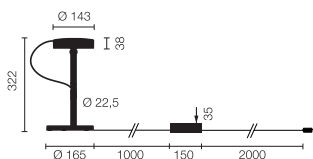

≈97% cd/1000 lm