



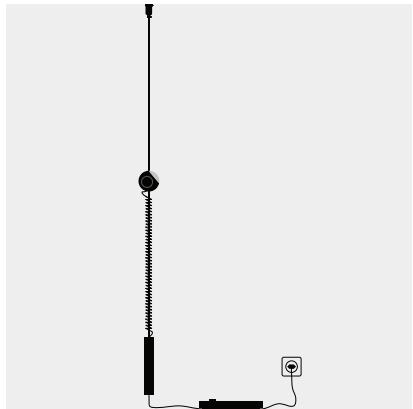

Type	hello Starter Set Vertical
Order No	HEL30-12-8030-00
Lamp type/assembly	Cable system
Version	Vertical
Colour	Black
Light source	LED
Colour temperature	3000 K
Colour rendering index	CRI > 90
Operating mode	On/Off
Operation	Foot switch, cable integrated
Ballast (number)	Foot switch with built-in LED converter, On/Off, output 48 V DC (1)
Power cable	Black, 3x0.75mm ² , L 3000 mm
Mains plug	CEE 7/7 (type E+F)
Beam angle	40°
Total luminous flux of luminaire	490 lm @ 3000 K
Power consumption	max. 38 W
Luminaire efficacy	82 lm/W
LED service life	55 000 h (L85)
Packaging units	1 (300 x 300 x 80 mm)
Tooltip Description	Tension wire system belux hello: supplied universal dowels and screws are suitable for fixation in solid brick or concrete walls (ceiling). For drywalls, plasterboard, suspended ceilings, cavity bricks, wooden cladding or similar, measures for reinforcement must be taken prior to installation. It is the responsibility of the installer/user to choose suitable fixation technology! When planning numerous light sources (spots, floods) the additional weight might force the tension wire to sag. belux therefore always recommends an intermediate suspension BL540 144 000 007 when planning system lengths >= 5000mm.

Contents	[1 pc. each] Hello Spot 40°; Hello Connect, L 600..2000 mm; cable holder; tension cable, L 4000 mm; weight with system supply incl. secondary cable, 2 x 0.25 mm ² , L 3000 mm; foot switch, On/Off, max. 38 W, incl. supply cable, black, and Swiss AC plug T12 (type J)
----------	--



Belux AG
Neufeldweg 6, CH-5103
Möriken
Tel. +41 61 316 74 01
Fax +41 61 316 75 99
www.belux.com
belux@belux.com