



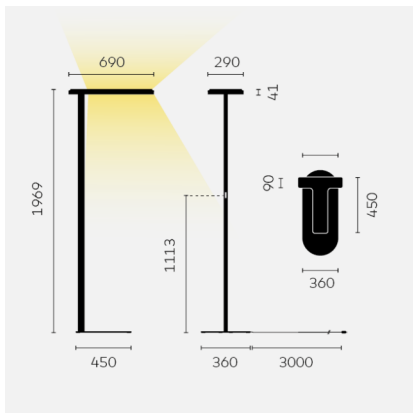

|                                  |                                                                  |
|----------------------------------|------------------------------------------------------------------|
| Type                             | KID12-14T-8030-MS                                                |
| Order No                         | KID12-14T-8030-MS                                                |
| Lamp type/assembly               | Standing luminaire                                               |
| Colour                           | White                                                            |
| Light source                     | LED                                                              |
| Energy efficiency class          | LED                                                              |
| Colour temperature               | 3000K                                                            |
| Colour rendering index           | CRI > 80                                                         |
| Operating mode                   | Multisens                                                        |
| Operation                        | Self-adjusting                                                   |
| Base                             | T-base                                                           |
| Power cable                      | Black, 3x0.75mm <sup>2</sup> , L 3000 mm                         |
| Mains plug                       | Swiss plug type J                                                |
| Light distribution               | Direct (20%) / indirect (80%)                                    |
| UGR                              | < 11                                                             |
| Total luminous flux of luminaire | 11200lm @ 4000K                                                  |
| Power consumption                | 90W                                                              |
| Luminaire efficacy               | 125lm/W @ 4000K                                                  |
| Safety class                     | I                                                                |
| Protection type                  | IP20                                                             |
| Packaging units                  | 3 ( ca. 940 x 380 x 85 + 2000 x 190 x 55<br>+ 570 x 475 x 45 mm) |
| Weight                           | 16kg                                                             |
| Tooltip Description              | New workspace lighting                                           |
| Guarantee                        | 36 months                                                        |

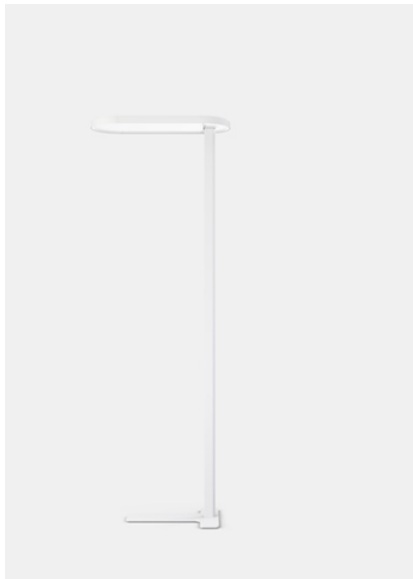

red dot

**Belux AG**  
Neufeldweg 6, CH-5103  
Möriken  
Tel. +41 61 316 74 01  
Fax +41 61 316 75 99  
www.belux.com  
belux@belux.com

