


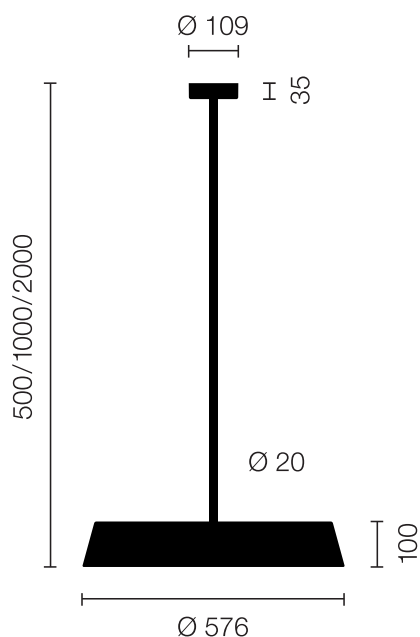

| Type                                     | KOI30-12-8030-00                                 |
|------------------------------------------|--------------------------------------------------|
| Order No                                 | KOI30-12-8030-00                                 |
| Lamp type/assembly                       | Pendant luminaire                                |
| Colour                                   | Chrome                                           |
| Colour temperature                       | 3000 K                                           |
| Colour rendering index                   | >= 80                                            |
| Operating mode                           | On/Off                                           |
| Operation                                | On site                                          |
| Ballast (number)                         | LED Converter (2), integrated in luminaire head  |
| Lamp head                                | PC, aluminium metallised                         |
| Diffuser                                 | PC, prismatic, dyed white                        |
| Suspension (number of suspension points) | 1000 mm (1)                                      |
| Suspension tube                          | Steel, chrome-plated                             |
| Ceiling rose                             | PA, painted, white and black, Ø 109 mm           |
| Power cable                              | Black, 3x0.75mm <sup>2</sup> , L ~300 mm         |
| Light distribution                       | Direct (27%) / indirect (73%)                    |
| UGR                                      | < 19                                             |
| Total luminous flux of luminaire         | 11825 lm @ 4000 K                                |
| Power consumption                        | 90 W                                             |
| Luminaire efficacy                       | 130 lm/W @ 4000 K                                |
| LED service life                         | 55 000 h (L85)                                   |
| Mains voltage                            | 220-240V, 50Hz                                   |
| Stand-by consumption                     | < 0.5 W                                          |
| Safety class                             | I                                                |
| Protection type                          | IP 20                                            |
| Packaging units                          | 2 (ca. 600 x 600 x 230 + 780/1280 x 200 x 50 mm) |
| Weight                                   | 8.4 kg                                           |
| Guarantee                                | 5 years                                          |

#### Belux AG

Neufeldweg 6, CH-5103  
Möriken  
Tel. +41 61 316 74 01  
Fax +41 61 316 75 99  
www.belux.com  
belux@belux.com

MINERGIE®

