




<b>Type</b>	<b>KOI30-13-8040-MS</b>
Order No	KOI30-13-8040-MS
Lamp type/assembly	Pendant luminaire
Colour	Chrome
Colour temperature	4000 K
Colour rendering index	>= 80
Operating mode	Multisens
Operation	Self-adjusting
Ballast (number)	LED Converter (2), integrated in luminaire head
Lamp head	PMMA, aluminium metallised
Diffuser	PC, prismatic, dyed white
Suspension (number of suspension points)	2000 mm (1)
Suspension tube	Steel, chrome-plated
Ceiling rose	PA, painted, white and black, Ø 109 mm
Power cable	Black, 5x0.75mm <sup>2</sup> , L ~300 mm
Light distribution	Direct (27%) / indirect (73%)
UGR	< 19
Total luminous flux of luminaire	11825 lm @ 4000 K
Power consumption	90 W
Luminaire efficacy	130 lm/W @ 4000 K
LED service life	55 000 h (L85)
Mains voltage	220-240V, 50Hz
Stand-by consumption	< 0.5 W
Safety class	I
Protection type	IP 20
Packaging units	2 (ca. 600 x 600 x 230 + 780/1280 x 200 x 50 mm)
Weight	8.4 kg
Guarantee	36 months

**Belux AG**

Neufeldweg 6, CH-5103  
Möriken  
Tel. +41 61 316 74 01  
Fax +41 61 316 75 99  
www.belux.com  
belux@belux.com

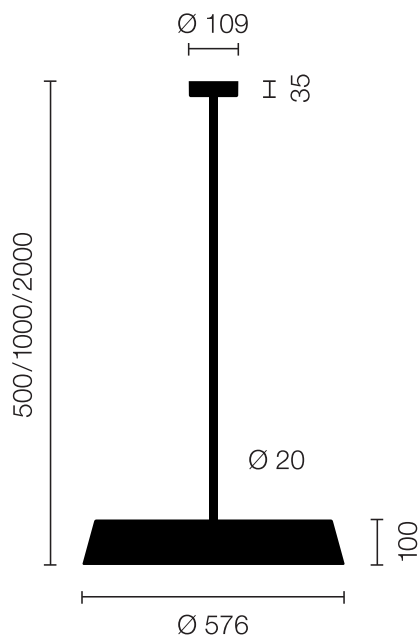

**MINERGIE®**

