


belux disk

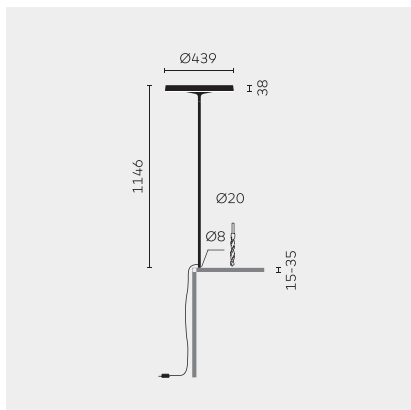



Type/Order No	DIS40-12-TD
Lamp type/assembly	Table light
Version	USM Haller
Cable exit	Lateral
Colour	Chrome
Light source	1x T5 FC (FC) 55W; 2Gx13 + 1x T5 FC (FC) 60W; 2Gx13
Operating mode	Dimmable
Operation	On lamp head
Ballast (number)	Electronic ballast dimmable (2)
Lamp head	Aluminium die-cast
Diffuser	PMMA lens
Tube	Steel, chrome-plated
Power cable	Transparent, 3x0.75mm ² , L 4500 mm
Mains plug	Schuko plug type E+F
Light distribution	Direct (26.8%) / indirect (73.2%)
Power consumption	115 W
Luminaire efficacy	80.06%
Mains voltage	220-240V, 50/60Hz
Stand-by consumption	< 0.5W
Safety class	I
Protection type	IP 20
Packaging units	2 (480 x 480 x 140 mm + 1920 x 100 x 100 mm)
Weight	6.7 kg
Remark	Not compatible with height adjustable tables
Guarantee	36 months

Belux AG

Neufeldweg 6, CH-5103
Möriken
Tel. +41 61 316 74 01
Fax +41 61 316 75 99
www.belux.com
belux@belux.com

MINERGIE®

light of
the future



≈80.06% CD/1000lm

www.belux.com/disk