

belux **koi neo**

Naoto Fukasawa, 2010



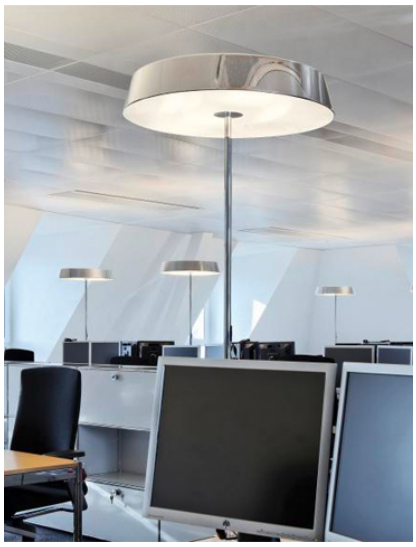


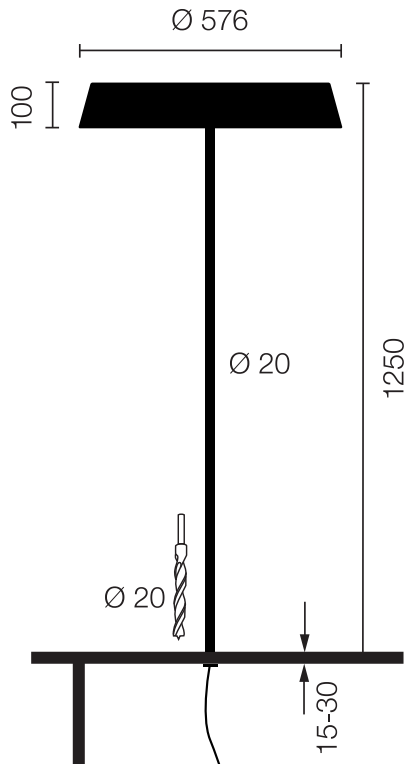

Type	KOI46-15-8030-MS
Order No	KOI46-15-8030-MS
Lamp type/assembly	Table luminaire
Version	Universal-D
Adaptation point	For permanent fastening to any tabletop
Cable exit	Underneath the tabletop
Colour	White
Colour temperature	3000 K
Colour rendering index	>/= 80
Operating mode	Multisens
Operation	Self-adjusting
Ballast (number)	LED Converter (2), integrated in luminaire head
Lamp head	PC, white, painted
Diffuser	PC, prismatised, dyed white
Tube	Steel, white, powder-coated
Power cable	Black, 3x0.75mm² , L 5000 mm (1000 mm with Wieland GST18 connector + 4000 mm with Wieland GST18 socket and plug)
Mains plug	Schuko plug type E+F
Light distribution	Direct (27%) / indirect (73%)
UGR	< 19
Total luminous flux of luminaire	11825 lm @ 4000 K
Power consumption	90 W
Luminaire efficacy	130 lm/W @ 4000 K
LED service life	55 000 h (L85)
Mains voltage	220-240V, 50Hz
Stand-by consumption	< 0.5 W
Safety class	I
Protection type	IP 20
Packaging units	2 (ca. 600 x 600 x 230 + 1550 x 200 x 50 mm)
Weight	10.3 kg
Guarantee	5 years

MINERGIE®





Belux AG
Neufeldweg 6, CH-5103
Möriken
Tel. +41 61 316 74 01
Fax +41 61 316 75 99
www.belux.com
belux@belux.com

www.belux.com/koi