


B E L U X koi-q


Naoto Fukasawa

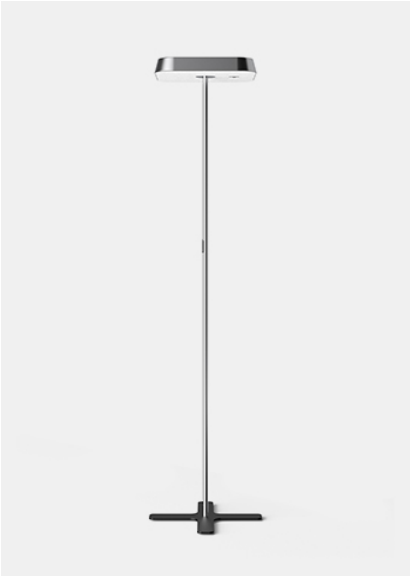

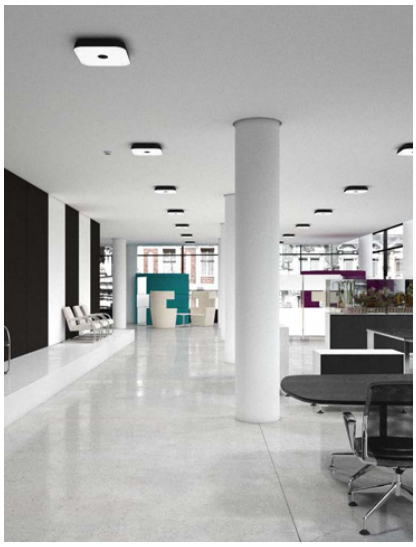

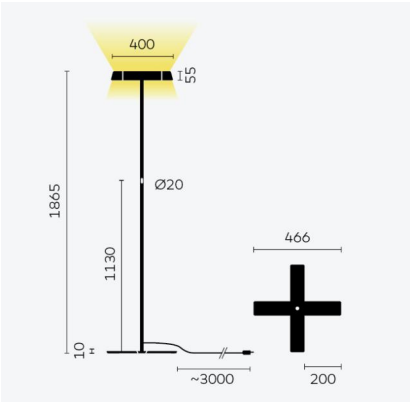

Type	KOIQ10B-17-8030-TD
Order No	KOIQ10B-17-8030-TD
Lamp type/assembly	Standing luminaire
Colour	Chrome
Light source	LED
Colour temperature	3000 K
Colour rendering index	>80
Operating mode	Dimmable
Operation	On tube
Ballast (number)	LED converter, integrated in luminaire head
Lamp head	PC, aluminium metallised
Diffuser	PC, prismatised
Base	Die cast zinc, painted
Power cable	Black, 3x0.75mm² , L 3000 mm
Mains plug	UK plug type G
Light distribution	Direct (33%) / indirect (67%)
UGR	</= 13
Total luminous flux of luminaire	8900 lm @ 4000 K
Power consumption	78W
Luminaire efficacy	114 lm/W
LED service life	55 000 h (L85/B30)
Mains voltage	220-240V, 50Hz
Stand-by consumption	< 0.5 W
Safety class	I
Protection type	IP 20
Packaging units	3
Weight	9.9 kg
Guarantee	5 years



Belux AG
Neufeldweg 6, CH-5103
Möriken
Tel. +41 61 316 74 01
Fax +41 61 316 75 99
www.belux.com
belux@belux.com