

belux classic


Albert Schuppli, 1989



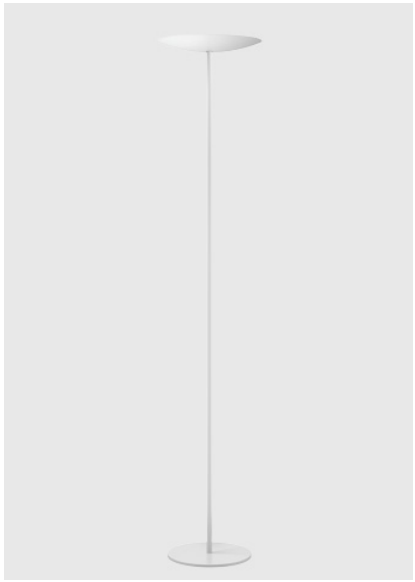

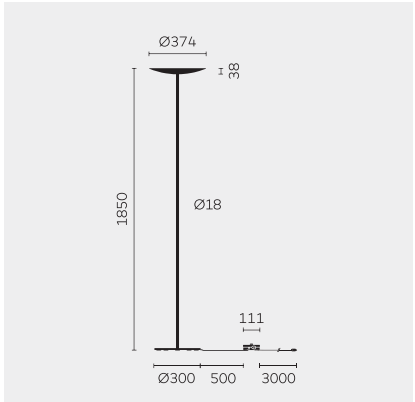

Type	CLA10-14-8030-TD
Order No	CLA10-14-8030-TD
Lamp type/assembly	Standing luminaire
Colour	White
Energy efficiency class	E
Colour temperature	3000 K
Colour rendering index	>80
Operating mode	Dimmable
Operation	Foot switch, cable integrated
Ballast (number)	Driver (1), cable integrated
Lamp head	Steel, powder-coated
Tube	Steel, powder-coated
Base	Steel, powder-coated
Power cable	Black, L 3000 mm
Mains plug	Swiss plug type J
Light distribution	Indirect (100%)
Total luminous flux of luminaire	8000 lm
Power consumption	80 W
Luminaire efficacy	99 lm/W
Mains voltage	220-240V / 50Hz
Stand-by consumption	< 0.5 W
Safety class	I
Protection type	IP 20
Packaging units	1 (ca. 1900 x 450 x 450 mm)
Guarantee	5 years



Belux AG

Neufeldweg 6, CH-5103
Möriken
Tel. +41 61 316 74 01
Fax +41 61 316 75 99
www.belux.com
belux@belux.com