






Type	UTN12-13-TD-8027
Order No	UTN12-13-TD-8027
Lamp type/assembly	Standing luminaire
Size	H 1335 mm
Light source	LED, 2x 900 lm
Colour temperature	2700 K
Colour rendering index	CRI > 80
Operating mode	Dimmable
Operation	On tube
Ballast (number)	Driver (1), cable integrated
Lamp head	Die cast aluminum, wet painted, telegrey
Diffuser	PMMA, frosted on one side
Tube	Extruded aluminum profile, wet painted, telegrey
Base	Zinc die-cast, wet painted, telegrey
Finish	Telegrey
Power cable	Black, L 2000 mm
Mains plug	Schuko plug type E+F
Light distribution	Direct
Beam angle	Adjustable 40° / 80°
Total luminous flux of luminaire	2x900 lm
Power consumption	2x 13W
Mains voltage	220-240V / 50Hz
Stand-by consumption	< 0,5 W
Safety class	I
Protection type	IP 20
Packaging units	1 (1600 x 300 x 300 mm)
Weight	10.5 kg
Guarantee	36 months

Belux AG

Neufeldweg 6, CH-5103
Möriken
Tel. +41 61 316 74 01
Fax +41 61 316 75 99
www.belux.com
belux@belux.com

design
preis
SCHWEIZ

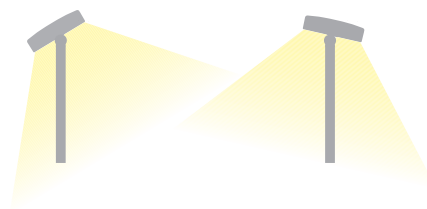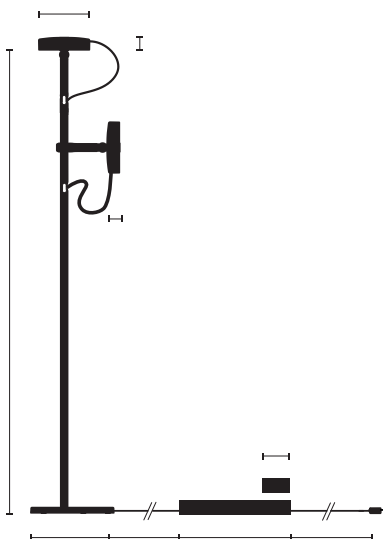

www.belux.com/u-turn

97% cd/1000 lm