
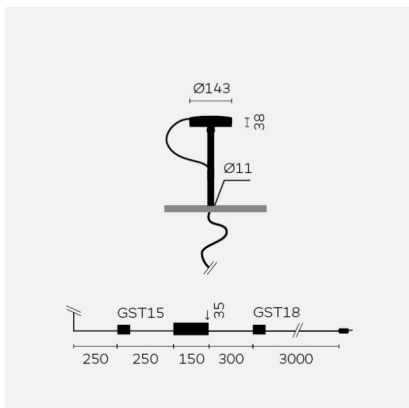


| Type                             | UTN42-16-TD-8027                                                                       |
|----------------------------------|----------------------------------------------------------------------------------------|
| Order No                         | UTN42-16-TD-8027                                                                       |
| Lamp type/assembly               | Desk-mounted luminaire                                                                 |
| Version                          | Vitra "Port"                                                                           |
| Light source                     | LED, 1x 900 lm                                                                         |
| Colour temperature               | 2700 K                                                                                 |
| Colour rendering index           | CRI > 80                                                                               |
| Operating mode                   | Dimmable                                                                               |
| Operation                        | On tube                                                                                |
| Ballast (number)                 | Driver (1), cable integrated                                                           |
| Lamp head                        | Die cast aluminum, wet painted, graphite black                                         |
| Diffuser                         | PMMA, frosted on one side                                                              |
| Tube                             | Extruded aluminum profile, wet painted, graphite black                                 |
| Finish                           | Black                                                                                  |
| Power cable                      | Black, L 2500 mm (with GST18 plug only 800 mm)                                         |
| Mains plug                       | UK plug type G                                                                         |
| Fastening                        | For mounting on the cable feedthrough "Port" (e.g. with Workbays or Alcove Cabin/Meet) |
| Light distribution               | Direct                                                                                 |
| Beam angle                       | Adjustable 40° / 80°                                                                   |
| Total luminous flux of luminaire | 900 lm                                                                                 |
| Power consumption                | 13W                                                                                    |
| Mains voltage                    | 220-240V / 50Hz                                                                        |
| Stand-by consumption             | < 0,5 W                                                                                |
| Safety class                     | I                                                                                      |
| Protection type                  | IP 20                                                                                  |
| Packaging units                  | 1 (415 x 270 x 270 mm)                                                                 |
| Weight                           | 4.7 kg                                                                                 |
| Guarantee                        | 36 months                                                                              |

## Belux AG

Neufeldweg 6, CH-5103  
Möriken  
Tel. +41 61 316 74 01  
Fax +41 61 316 75 99  
www.belux.com  
belux@belux.com

design  
preis  
SCHWEIZ

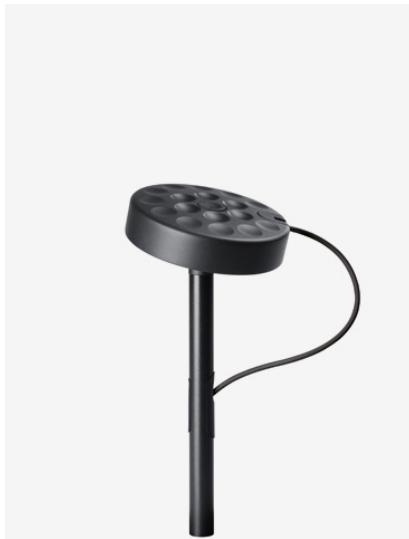