




Type	MBM-70-8030-1-10
Order No	MBM-70-8030-1-10
Lamp type/assembly	System luminaire
Description	Light unit
Light source	LED
Colour temperature	3000 K
Colour rendering index	CRI > 80
Chromaticity tolerance (initial	3 SDCM initial
MacAdam)	
Operating mode	Dimmable 1-10V
Ballast (number)	LED converter (1), integrated in
	luminaire
Feed-through wiring	5 x 1.5 mm ²
Length	713 mm
Lamp housing	Aluminium, anodised
Diffuser	PMMA
End cap	With built-in plug/socket for electrical
	through-connection
Total luminous flux of luminaire	938 lm @ 3000 K
Power consumption	13 W
Luminaire efficacy	75 lm/W @ 3000 K
LED service life	60 000 h (L80/B50) @ 65° C
Mains voltage	220-240V / 50Hz
Stand-by consumption	< 0.5 W
Safety class	I
Protection type	IP 20
Packaging units	1
Tooltip Description	Light by the metre with limitless
	possibilities
Remark	Light unit designed for use in the
	meter by meter carrier profile
Guarantee	36 months
Included accessories	Fastening clips

Belux AG
Neufeldweg 6, CH-5103
Möriken
Tel. +41 61 316 74 01
Fax +41 61 316 75 99
www.belux.com
belux@belux.com

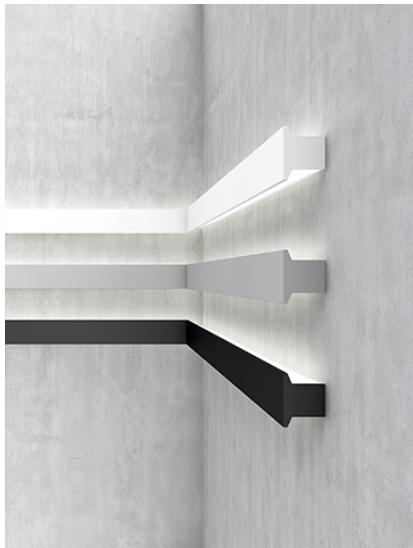