




Type	UPD30-11-8027-DD
Order No	UPD30-11-8027-DD
Lamp type/assembly	Pendant luminaire
Version	With adjustable reflectors
Cable exit	5 x 0,75mm ²
Colour	Aluminium
Colour temperature	2700 K
Colour rendering index	CRI > 80
Operating mode	Dimmable DALI/Push
Operation	On site
Ballast (number)	LED driver (1), cable integrated
Length	1260 mm
Reflector	Aluminium, anodised, matte finish
Suspension (number of suspension points)	2
Electronics housing	Aluminium, anodised, matte finish
Ceiling rose	White, Ø 108 mm
Power cable	Black, 3x0.75mm ² , L 2000 mm
Light distribution	Direct / indirect
Total luminous flux of luminaire	1946lm-3214lm
Power consumption	34 W
Mains voltage	220-240V / 50Hz
Stand-by consumption	< 0.5 W
Safety class	I
Protection type	IP 20
Packaging units	1 (1450 x 150 x 150 mm)
Weight	4.5 kg
Guarantee	36 months
Belux Express	Small quantities normally available from stock

Belux AG

Neufeldweg 6, CH-5103
Möriken
Tel. +41 61 316 74 01
Fax +41 61 316 75 99
www.belux.com
belux@belux.com

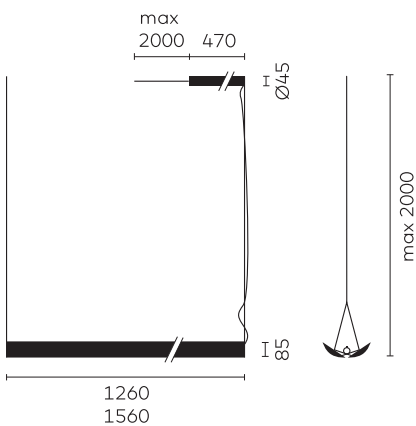

red dot
best of the best

design
preis
SCHWEIZ

