




<b>Type</b>	<b>UPD32-13-8027-DD</b>
Order No	UPD32-13-8027-DD
Lamp type/assembly	Pendant luminaire
Version	With adjustable reflectors
Cable exit	5 x 0,75mm <sup>2</sup>
Colour	Black
Colour temperature	2700 K
Colour rendering index	CRI > 80
Operating mode	Dimmable DALI/Push
Operation	On site
Ballast (number)	LED driver (1), cable integrated
Length	1560 mm
Reflector	Aluminium, anodised, matte finish / inside in light gold
Suspension (number of suspension points)	2
Electronics housing	Aluminium, anodised, matte finish
Ceiling rose	White, Ø 108 mm
Power cable	Black, 3x0.75mm <sup>2</sup> , L 2000 mm
Light distribution	Direct / indirect
Total luminous flux of luminaire	2554lm-4218lm
Power consumption	42 W
Mains voltage	220-240V / 50Hz
Stand-by consumption	< 0.5 W
Safety class	I
Protection type	IP 20
Packaging units	1 (1750 x 150 x 150 mm)
Weight	4.5 kg
Guarantee	36 months
Belux Express	Small quantities normally available from stock

**Belux AG**

Neufeldweg 6, CH-5103  
Möriken  
Tel. +41 61 316 74 01  
Fax +41 61 316 75 99  
www.belux.com  
belux@belux.com

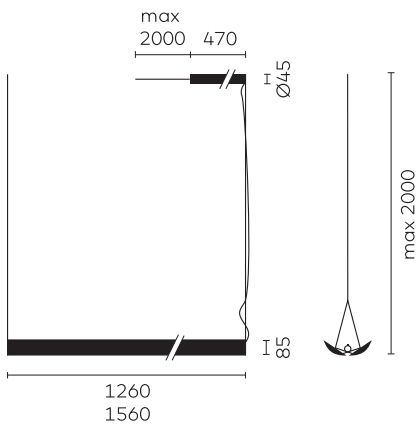

red dot  
best of the best

design  
preis  
SCHWEIZ

