


| | |
|-------------------------|---|
| Type | DIS10-17-8030-TD |
| Order No | DIS10-17-8030-TD |
| Lamp type/assembly | Standing luminaire |
| Colour | Chrome |
| Energy efficiency class | E |
| Colour temperature | 3000K |
| Colour rendering index | CRI>80 |
| Operating mode | Dimmable |
| Operation | On lamp head |
| Lamp head | Aluminium die-cast |
| Diffuser | PMMA lens |
| Tube | Steel, chrome-plated |
| Base | Round base, steel, black, powder-coated |
| Power cable | Transparent, 3x0.75mm ² , L 3000 mm |
| Mains plug | UK plug type G |
| Light distribution | Direct (26.8%) / indirect (73.2%) |
| Total luminous flux | 8590lm |
| Power consumption | 72W |
| Luminaire efficacy | 120 lm/W |
| LED service life | 50'000h |
| Mains voltage | 220-240V, 50/60Hz |
| Stand-by consumption | < 0.5W |
| Safety class | I |
| Protection type | IP 20 |
| Packaging units | 2 (480 x 480 x 140 mm + 1920 x 100 x 100 mm) |
| Weight | 12.7 kg |
| Guarantee | 36 months |

Belux AG

Neufeldweg 6, CH-5103
Möriken
Tel. +41 61 316 74 01
Fax +41 61 316 75 99
www.belux.com
belux@belux.com

MINERGIE®

light of
the future

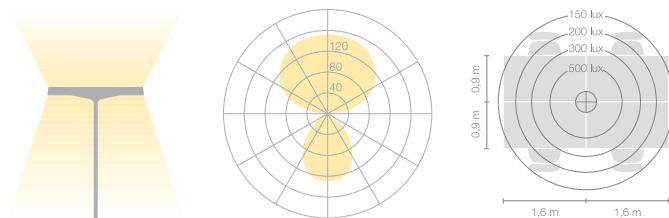

γ=80.06% CD/1000lm