


<b>Type</b>	<b>DIS10-15-8040-MS</b>
Order No	DIS10-15-8040-MS
Lamp type/assembly	Standing luminaire
Colour	Black
Energy efficiency class	E
Colour temperature	4000K
Colour rendering index	CRI>80
Operating mode	Multisens
Operation	On lamp head
Lamp head	Aluminium die-cast
Diffuser	PMMA lens
Tube	Steel, black, powder-coated
Base	Round base, steel, black, powder-coated
Power cable	Transparent, 3x0.75mm <sup>2</sup> , L 3000 mm
Mains plug	Schuko plug type E+F
Light distribution	Direct (26.8%) / indirect (73.2%)
Total luminous flux	8590lm
Power consumption	72W
Luminaire efficacy	120 lm/W
LED service life	50'000h
Mains voltage	220-240V, 50/60Hz
Stand-by consumption	< 0.5W
Safety class	I
Protection type	IP 20
Packaging units	2 (480 x 480 x 140 mm + 1920 x 100 x 100 mm)
Weight	12.7 kg
Guarantee	36 months

**Belux AG**

Neufeldweg 6, CH-5103  
Möriken  
Tel. +41 61 316 74 01  
Fax +41 61 316 75 99  
www.belux.com  
belux@belux.com

**MINERGIE®**

light of  
the future

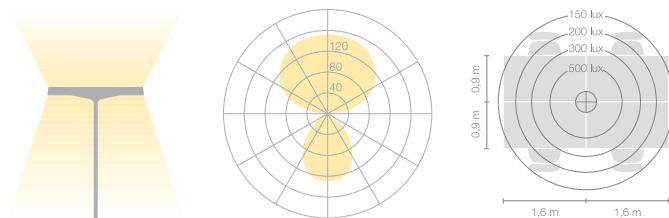

γ=80.06% CD/1000lm