


Type	DIS30-11-8030-DD
Order No	DIS30-11-8030-DD
Lamp type/assembly	Pendant luminaire
Colour	Chrome
Energy efficiency class	E
Colour temperature	3000K
Colour rendering index	CRI>80
Operating mode	Dimmable DALI
Operation	On site
Lamp head	Aluminium die-cast
Diffuser	PMMA lens
Base	Round base, steel, black, powder-coated
Suspension (number of suspension points)	max. 2000 / 5000 mm (3)
Ceiling rose	White, Ø 123 mm
Power cable	White, 5x0.75mm ² , L 2400 / 5400 mm
Light distribution	Direct (26.8%) / indirect (73.2%)
Total luminous flux	8590lm
Power consumption	72W
Luminaire efficacy	120 lm/W
LED service life	50'000h
Mains voltage	220-240V, 50/60Hz
Stand-by consumption	< 0.5W
Safety class	I
Protection type	IP 20
Packaging units	1 (480 x 480 x 140 mm)
Weight	4.0 kg
Guarantee	36 months

Belux AG

Neufeldweg 6, CH-5103
Möriken
Tel. +41 61 316 74 01
Fax +41 61 316 75 99
www.belux.com
belux@belux.com



light of
the future

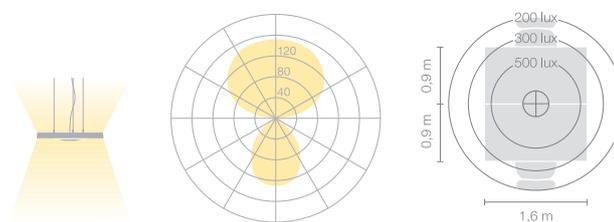

γ=80.06% CD/1000lm