



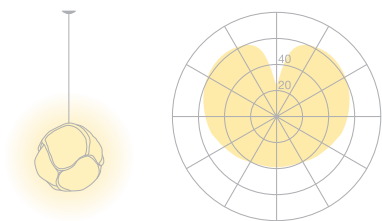

|                                          |                                    |
|------------------------------------------|------------------------------------|
| Type                                     | CLD34-22                           |
| Order No                                 | CLD34-22                           |
| Lamp type/assembly                       | Pendant luminaire                  |
| Size                                     | Ø ~600 mm                          |
| Socket                                   | E27                                |
| Light source                             | excluded                           |
| Operating mode                           | Dimmable                           |
| Operation                                | On site                            |
| Lamp shade                               | Polyester fleece                   |
| Suspension (number of suspension points) | 1                                  |
| Ceiling rose                             | White, Ø 108 mm                    |
| Power cable                              | Transparent, 2x0.75mm² , L 5000 mm |
| Light distribution                       | Diffuse                            |
| Power consumption                        | max. 70 W                          |
| Luminaire efficacy                       | 66.5%                              |
| Mains voltage                            | 220-240V 50/60Hz                   |
| Stand-by consumption                     | 0W                                 |
| Safety class                             | II                                 |
| Protection type                          | IP 20                              |
| Packaging units                          | 1 (730 x 730 x 200 mm)             |
| Weight                                   | 2.2 kg                             |
| Guarantee                                | 36 months                          |

Belux AG  
Neufeldweg 6, CH-5103  
Möriken  
Tel. +41 61 316 74 01  
Fax +41 61 316 75 99  
www.belux.com  
belux@belux.com

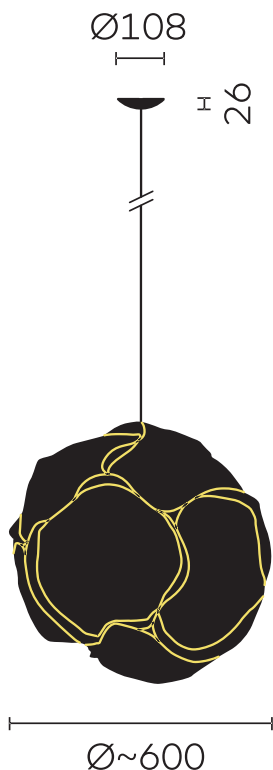

η=66.5% CD/1000lm