
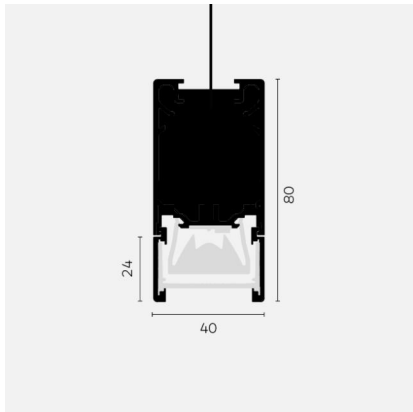


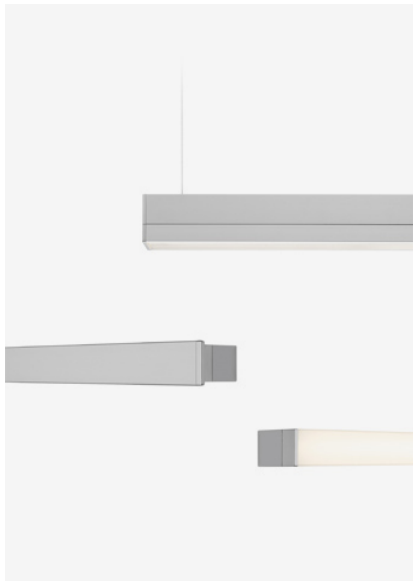

| Type                   | INLINE-66                       |
|------------------------|---------------------------------|
| Order No               | INL66-5-AL-8040-DD-3            |
| Lamp type/assembly     | Pendant luminaire               |
| Version                | Direct                          |
| Colour                 | Aluminium                       |
| Colour temperature     | 4000 K                          |
| Colour rendering index | CRI90                           |
| Operating mode         | Dimmable DALI                   |
| Operation              | On site                         |
| Feed-through wiring    | 6 x 1,5mm <sup>2</sup> max. 10A |
| Lamp housing           | Aluminium, PMMA                 |
| Light distribution     | F - lvr (Louver Raster)         |
| Current                | 350 mA                          |
| Power consumption      | Ca. 23,3W/m                     |
| Luminaire efficacy     | 1675lm/m                        |
| LED service life       | 55'000h (L90/F10)               |
| Mains voltage          | 220-240V, 50Hz                  |
| Safety class           | I                               |
| Protection type        | IP 20                           |
| Guarantee              | 36 months                       |

**Belux AG**  
Neufeldweg 6, CH-5103  
Möriken  
Tel. +41 61 316 74 01  
Fax +41 61 316 75 99  
www.belux.com  
belux@belux.com