






<b>Type</b>	<b>UTN34-11-00-8027</b>
Order No	UTN34-11-00-8027
Lamp type/assembly	Pendant luminaire
Version	Fixed connection
Light source	LED, 1x 1150 lm
Colour temperature	2700 K
Colour rendering index	CRI > 80
Operating mode	On/Off
Operation	On site
Ballast (number)	ON/OFF driver (1), integrated in ceiling rose
Lamp head	Zinc die-cast, wet painted, telegrey
Diffuser	PMMA, frosted on one side
Suspension (number of suspension points)	3000 mm (1)
Finish	Telegrey
Ceiling rose	Steel, telegrey; Ø 160 mm
Light distribution	Direct
Beam angle	Adjustable 40° / 80°
Total luminous flux of luminaire	1x 1150 lm
Power consumption	16W
Mains voltage	220-240V / 50Hz
Stand-by consumption	< 0,5 W
Safety class	I
Protection type	IP 20
Packaging units	1 (360 x 190 x 120 mm)
Weight	1.3 kg
Guarantee	5 years

**Belux AG**

Neufeldweg 6, CH-5103  
Möriken  
Tel. +41 61 316 74 01  
Fax +41 61 316 75 99  
www.belux.com  
belux@belux.com

design  
preis  
SCHWIZ

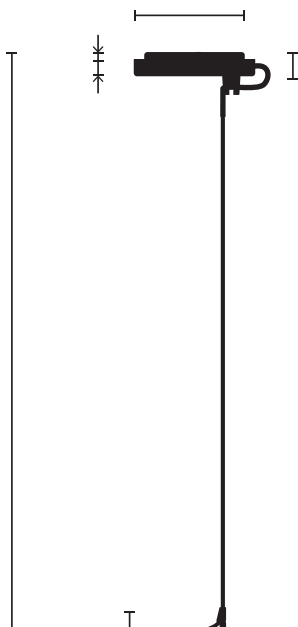

≈97% cd/1000 lm