






Type	UTN34-11-TD-8027
Order No	UTN34-11-TD-8027
Lamp type/assembly	Pendant luminaire
Version	Fixed connection
Light source	LED, 1x 1150 lm
Colour temperature	2700 K
Colour rendering index	CRI > 80
Operating mode	Dimmable
Operation	On site
Ballast (number)	Dimmable driver (1), integrated in ceiling rose
Lamp head	Zinc die-cast, wet painted, telegrey
Diffuser	PMMA, frosted on one side
Suspension (number of suspension points)	3000 mm (1)
Finish	Telegrey
Electronics housing	Die cast aluminum, wet painted, telegrey
Ceiling rose	Steel, telegrey; Ø 160 mm
Light distribution	Direct
Beam angle	Adjustable 40° / 80°
Total luminous flux of luminaire	1x 1150 lm
Power consumption	16W
Mains voltage	220-240V / 50Hz
Stand-by consumption	< 0,5 W
Safety class	I
Protection type	IP 20
Packaging units	1 (360 x 190 x 120 mm)
Weight	1.3 kg
Guarantee	36 months

Belux AG

Neufeldweg 6, CH-5103
Möriken
Tel. +41 61 316 74 01
Fax +41 61 316 75 99
www.belux.com
belux@belux.com

design
preis
SCHWEIZ

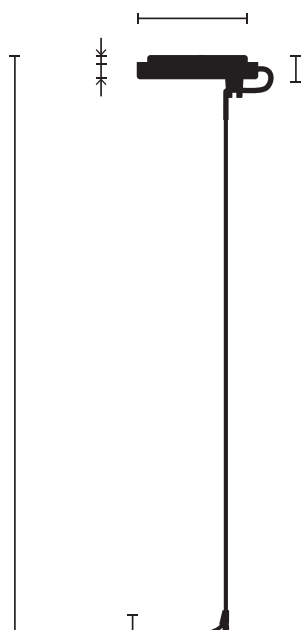

≈97% cd/1000 lm