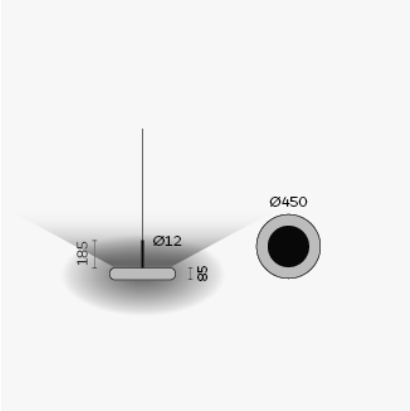


| Type | OTO34-14-9040-MS |
|---|---|
| Order No | OTO34-14-9040-MS |
| Lamp type/assembly | Pendant luminaire |
| Colour | White, structered, matt |
| Size | Ø 450 |
| Material | Silicone, steel, aluminium, PMMA |
| Light source | LED |
| Colour temperature | 4000K |
| Colour rendering index | CRI > 90 |
| Operating mode | Multisens |
| Power cable | PV cable, black |
| UGR | UGR<11 |
| Total luminous flux of luminaire | 11050lm @ 4000K |
| Power consumption | 73W |
| Luminaire efficacy | 151 lm/W |
| Safety class | I |
| Protection type | IP20 |
| Packaging units | 1 (50 x 50 x 16mm) |
| Weight | 5.68 kg |
| Guarantee | 36 months |

reddot winner 2025
lighting design

**Belux AG**

Neufeldweg 6, CH-5103
Möriken
Tel. +41 61 316 74 01
Fax +41 61 316 75 99
www.belux.com
belux@belux.com