belux u-turn

Michel Charlot






Type	UTN36-12-00-8027
Order No	UTN36-12-00-8027
Lamp type/assembly	Pendant luminaire
Version	Fixed connection
Light source	LED, 2x 1150 lm
Colour temperature	2700 K
Colour rendering index	CRI > 80
Operating mode	On/Off
Operation	On site
Ballast (number)	ON/OFF driver (2), integrated in ceiling rose
Lamp head	Zinc die-cast, wet painted, graphite black
Diffuser	PMMA, frosted on one side
Suspension (number of suspension points)	2x 3000 mm (1)
Finish	Black
Ceiling rose	Steel, graphite black; Ø 227 mm
Light distribution	Direct
Beam angle	Adjustable 40° / 80°
Total luminous flux of luminaire	2x 1150 lm
Power consumption	2x 16W
Mains voltage	220-240V / 50Hz
Stand-by consumption	< 0,5 W
Safety class	I
Protection type	IP 20
Packaging units	1 (410 x 330 x 90 mm)
Weight	3.0 kg
Guarantee	5 years


design preis schweiz

Swiss Federal Design Award

design arena preis 2013 gewinner

Leuchte des Jahres 2014

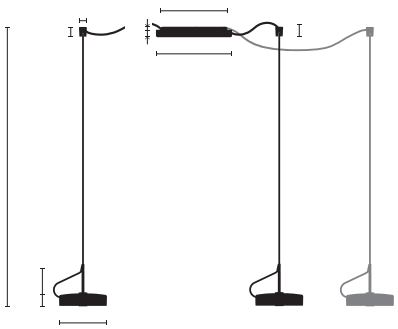

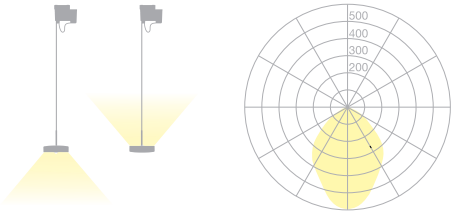

?=97% cd/1000 lm

Belux AG
Neufeldweg 6, CH-5103
Möriken
Tel. +41 61 316 74 01
Fax +41 61 316 75 99
www.belux.com
belux@belux.com