



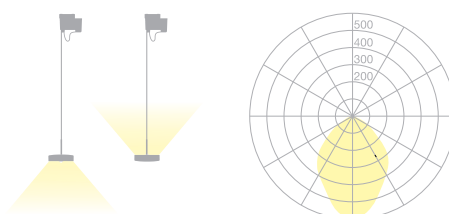

<b>Type/Order No</b>	<b>UTN38-11-TD-8027</b>
Lamp type/assembly	Pendant light
Version	Fixed connection
Energy efficiency class	A
Light source	LED, 3x 1150 lm
Colour temperature	2700 K
Colour rendering index	CRI > 80
Operating mode	Dimmable
Operation	On site
Ballast (number)	Dimmable driver (3), integrated in ceiling rose
Lamp head	Zinc die-cast, wet painted, telegrey
Diffuser	PMMA, frosted on one side
Suspension (number of suspension points)	3x 3000 mm (1)
Finish	Telegrey
Ceiling rose	Steel, telegrey; Ø 227 mm
Light distribution	Direct
Beam angle	Adjustable 40° / 80°
Total luminous flux of luminaire	LED, 3x 1150 lm
Power consumption	3x 16W
Mains voltage	220-240V / 50Hz
Stand-by consumption	< 0,5 W
Safety class	I
Protection type	IP 20
Packaging units	1 (410 x 330 x 90 mm)
Weight	3.6 kg
Guarantee	36 months

**Belux AG**  
 Neufeldweg 6, CH-5103  
 Möriken  
 Tel. +41 61 316 74 01  
 Fax +41 61 316 75 99  
 www.belux.com  
 belux@belux.com

design  
preis  
SCHWEIZ

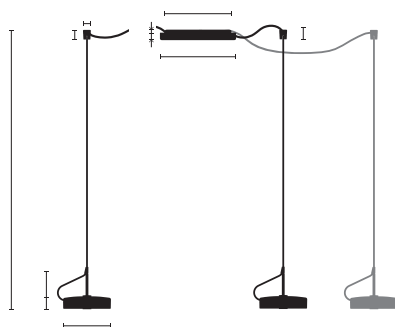

≈97% cd/1000 lm