


# belux karo

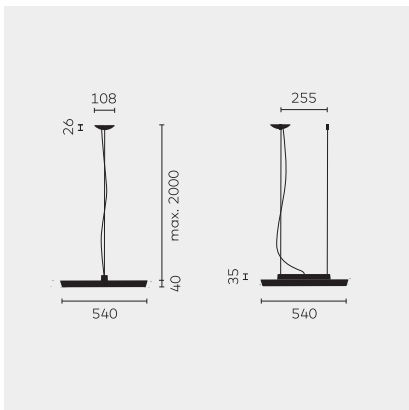

Type/Order No	KRO30-13-8040-DD
Lamp type/assembly	Pendant light
Version	Symmetrical light distribution
Colour	Black
Light source	LED, 4000 K, 5900 lm, CRI > 80
Operating mode	Dimmable DALI
Operation	On site
Ballast (number)	Driver (1), integrated integrated in lamp head
Lamp head	Aluminium, die-cast
Diffuser	PMMA
Suspension (number of suspension points)	2000 mm (2)
Finish	Black RAL 9005, powder-coated
Ceiling rose	White, Ø 108 mm
Power cable	Transparent, 5x0.75mm <sup>2</sup> , L 2500 mm
Light distribution	Direct (44%) / indirect (56%)
UGR	< 12
Power consumption	93 W
Luminaire efficacy	100%
Mains voltage	220-240V, 50/60Hz
Stand-by consumption	< 0.5 W
Safety class	I
Protection type	IP 20
Packaging units	1 (640 x 640 x 130 mm)
Weight	8.4 kg
Guarantee	36 months

## Belux AG

Neufeldweg 6, CH-5103  
Möriken  
Tel. +41 61 316 74 01  
Fax +41 61 316 75 99  
www.belux.com  
belux@belux.com

