

belux




bob

Design: minimal. Output: maximum

New on the team, but a high performer right from the outset. With its minimalist design, bob blends effortlessly into any office environment – always presenting a sleek look, even under the strictest clean desk policy.

Distinctive feature: a powerful optical unit – gracefully suspended above head height in the pendant light version. The floor light impresses with its striking volumetric form, created by the unusual 83° angle of the luminaire head.

bob's technical skills? Controlled via Multisens or Touch Dim, the asymmetrical light distribution guarantees uniform illumination across dual workstations – including on height-adjustable desks. The result: optimal glare-free light and superior visual comfort. All this at a price that even the accounts team will appreciate.

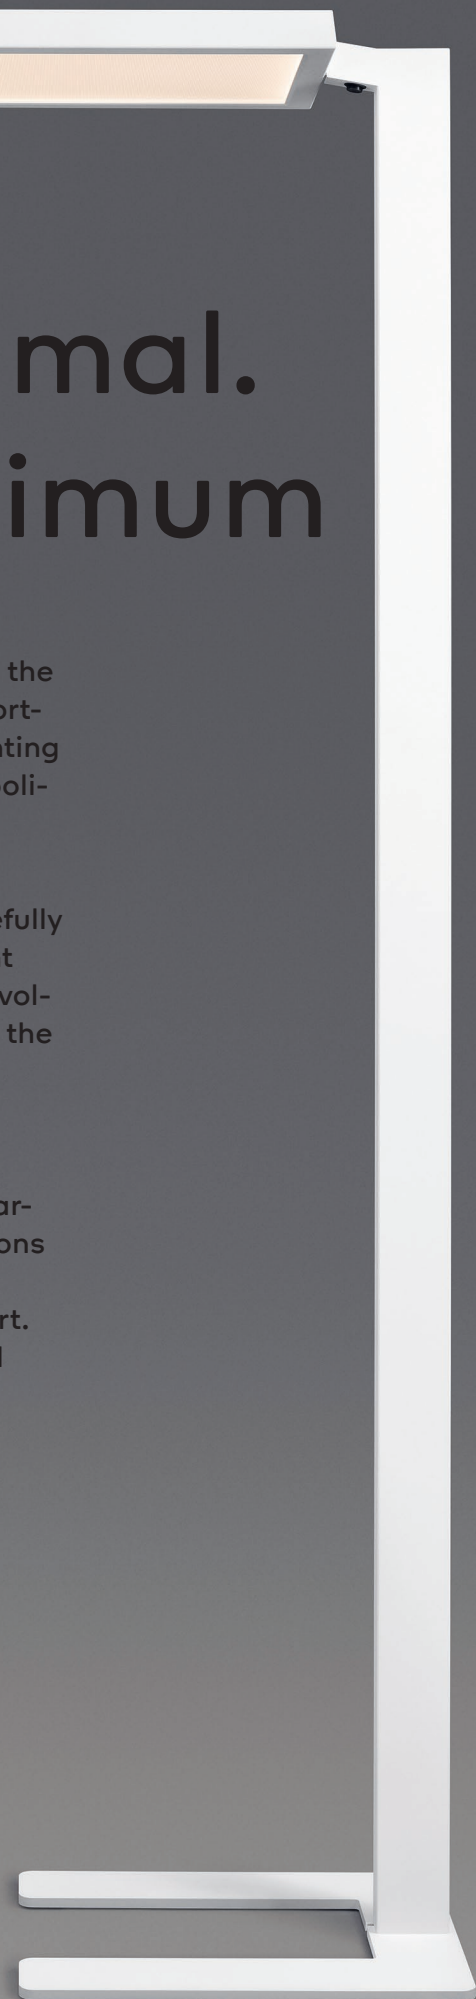

Design: Kristof Pycke and Bruno Aeberli



Light source
LED



Light distribution

Floor light:
16% direct, 84% indirect
Pendant light:
25% direct, 75% indirect
Simultaneously controlled



Lighting control
Touch Dim
Multisens



Colours
Black and white


Finish
Textured lacquer, matt



Cable outlet integrated in the base plate




Floor light with touch dim on the luminaire head

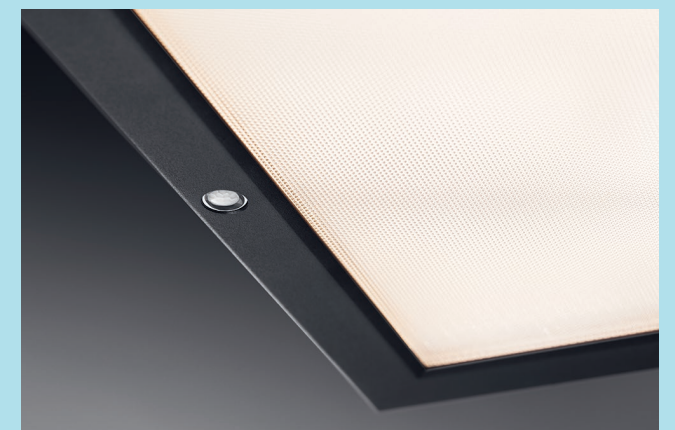


Pendant light and floor light with Multisens: Sensor integrated in the frame. For individual and optimal light control – tailored to daylight and presence in the workspace.

belux bob

bob floor light

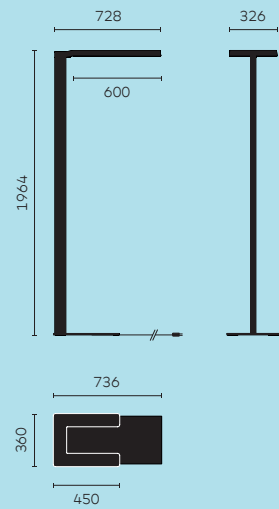

bob pendant light



Installation instructions

bob 12



bob 30



Colour	Light source	Main code	Light source					Main code
			8030 3000K	8040 4000K	9035 3500K	DD Dimmable w/ DALI, customer supplied	MS Multisens, self-regulating	
WE	①	BOB12-15	●	●	●	●	●	BOB12-15-8030-MS BOB12-15-8030-TD BOB12-15-8040-MS BOB12-15-8040-TD BOB12-15-9035-MS BOB12-15-9035-TD
			●	●	●	●	●	BOB12-18-8030-MS BOB12-18-8030-TD BOB12-18-8040-MS BOB12-18-8040-TD BOB12-18-9035-MS BOB12-18-9035-TD
SW	②	BOB30-14	●	●	●	●	●	BOB30-14-8030-DD BOB30-14-8030-MS BOB30-14-8040-DD BOB30-14-8040-MS BOB30-14-9035-DD BOB30-14-9035-MS
			●	●	●	●	●	BOB30-17-8030-DD BOB30-17-8030-MS BOB30-17-8040-DD BOB30-17-8040-MS BOB30-17-9035-DD BOB30-17-9035-MS

bob floor light, U-base
Materials: PMMA, aluminium, steel, black mains cable
Country plug: Schuko plug CEE 7/7 (type E+F)

bob pendant light
Materials: PMMA, aluminium, transparent mains cable

INFORMATION

General: LED converter integrated in the luminaire head.


Floor light: light distribution 16% direct / 84% indirect, UGR \leq 8.2

Pendant light: light distribution 25% direct / 75% indirect, UGR \leq 11.2


Touch Dim (TD): direct and indirect light are

controlled and dimmed simultaneously using the stem-mounted button
Multisens (MS): daylight and motion sensor for automatic operation; direct and indirect light are controlled simultaneously
WE: white, matt, structured
SW: black, matt, structured
 © IP 20

bob 12
10215lm/W@4000K

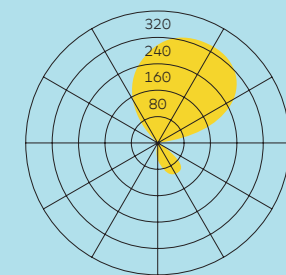

bob 30
12055lm/W@4000K

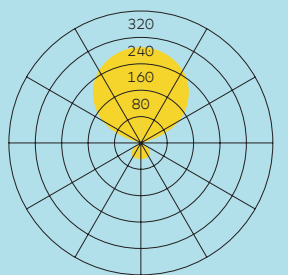

		CRI	CCT	Power	Lumen@4000K
①	LED	CRI > 80	3000/4000K	74W	10215lm
②	LED	CRI > 80	3000/4000K	88W	12055lm

Measured photometric data (3500K / CRI > 90) will be published on belux.com in due course.

belux


belux HQ

Neufeldweg 6
5103 Möriken
Switzerland
T +41 61 316 74 01
belux@belux.com

Fotos:

Henning Moser,
MOSER Fotografie & Postproduktion

EN-EU BL59999991
© belux AG 12/2025

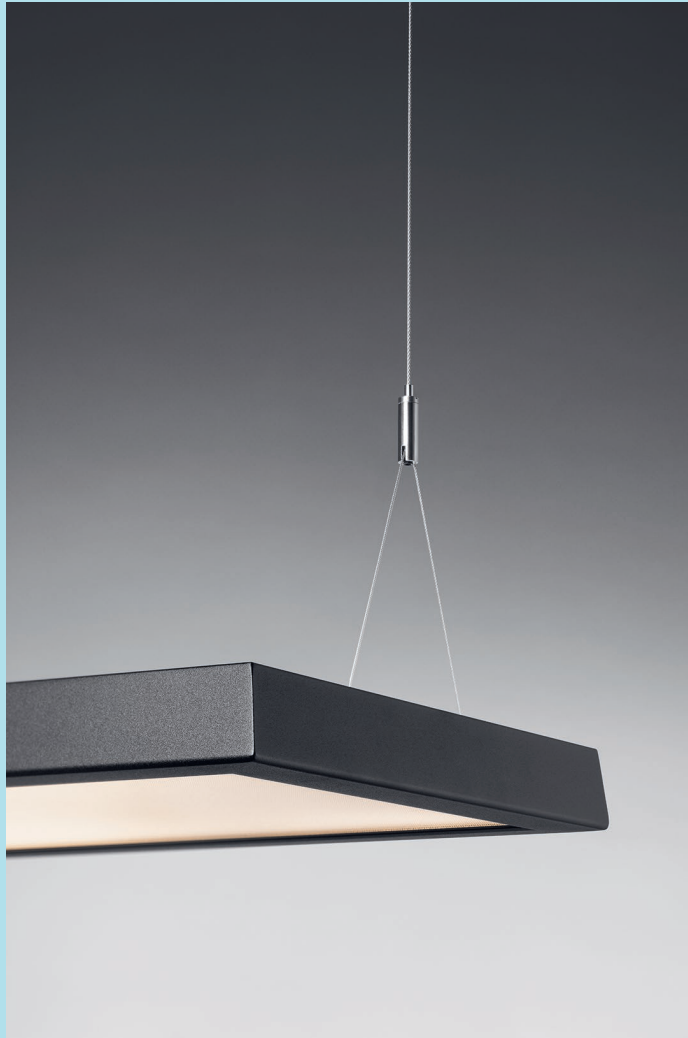

Belgium
belgium@belux.com

Denmark
denmark@belux.com

Finland
finland@belux.com

France
france@belux.com

Germany
germany@belux.com

Greece
greece@belux.com

Ireland
ireland@belux.com

Italy
italy@belux.com

Luxemburg
luxemburg@belux.com

Norway
norway@belux.com

Portugal
portugal@belux.com

Spain
spain@belux.com

Sweden
sweden@belux.com

The Netherlands
netherlands@belux.com

UK
uk@belux.com

belux.com